
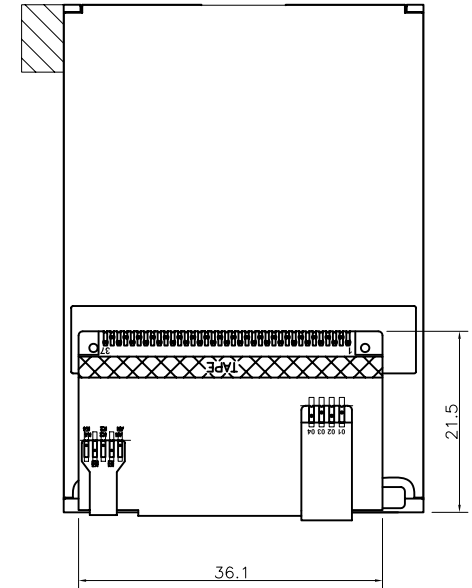
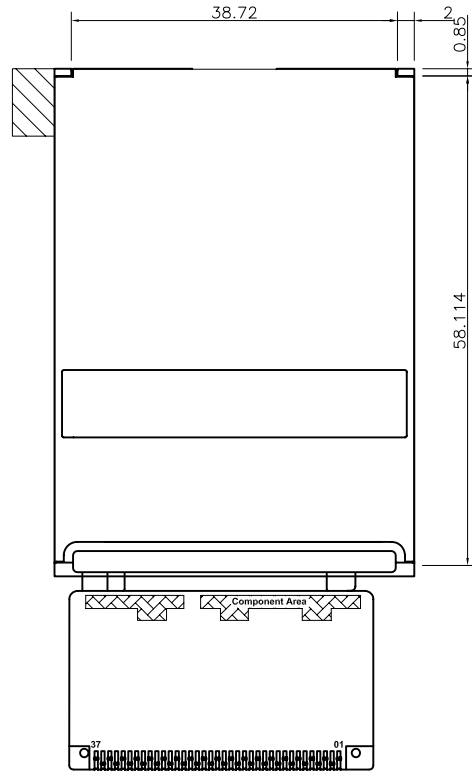
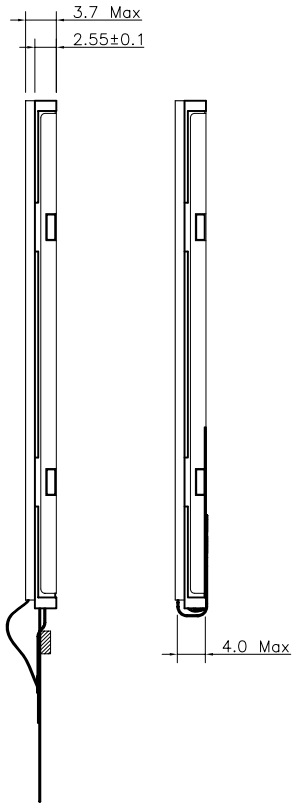


REV 版本	DESCRIPTION 描述	DATE 日期
V1	First issue	2007-03-21

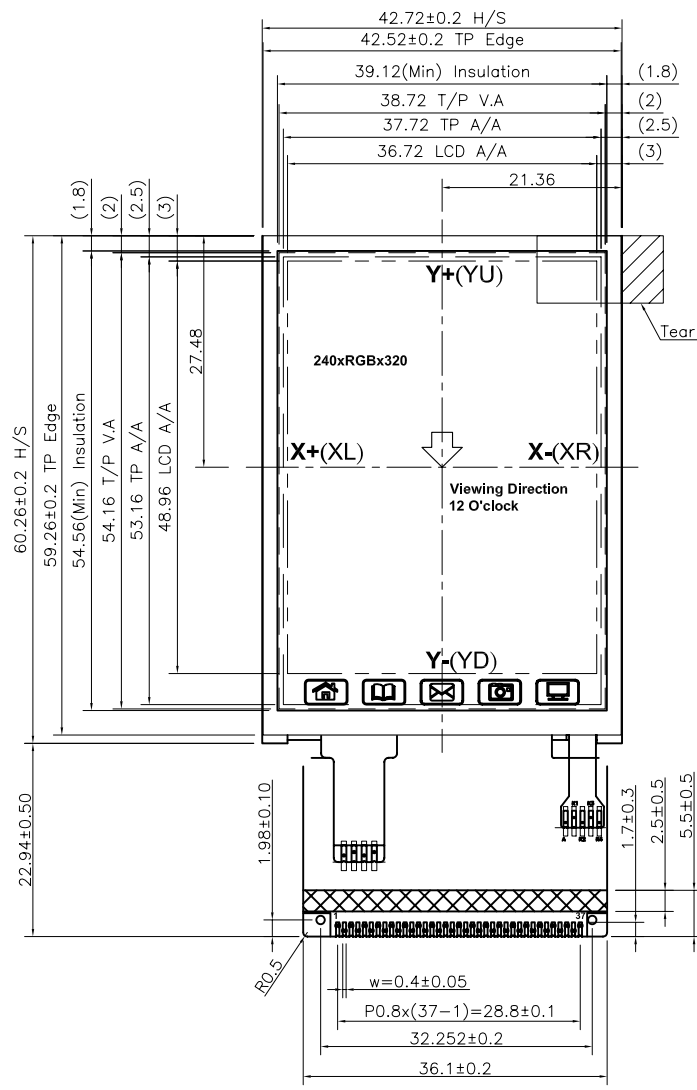


PIN DESCRIPTION

Pin	Pin Name	Pin	Pin Name	Pin	Pin Name	Pin	Pin Name
1	NC	11	DB02	21	DB12	31	LED-1
2	VDD	12	DB03	22	DB13	32	LED-2
3	VDD	13	DB04	23	DB14	33	LED-3
4	CS	14	DB05	24	DB15	34	LED-4
5	RS	15	DB06	25	NC	35	GND
6	WR	16	DB07	26	Y-(YD)	36	GND
7	RD	17	DB08	27	X-(XR)	37	NC
8	REST	18	DB09	28	Y+(YU)		
9	DB00	19	DB10	29	X+(XL)		
10	DB01	20	DB11	30	LED-A		

NOTE :

- MAIN LCD SPEC.
 - LCD TYPE : 262K COLOR ,FT
 - DRIVE IC : ILI9320
 - VIEWING DIRECTION : 12 O'CLOCK
- BACKLIGHT
 - WHITE LED 4 CHIP(parallel)
 - OPERATION TEMP. : -20° ~ 70°
 - STORAGE TEMP. : -30° ~ 80°

LED CIRCUIT DIAGRAM



Component Area H=1.2

SCALE: FIT		Tri-T Company Limited			
SHEET: 1 OF 1					
GENERAL TOL: ±0.3	UNIT mm	MODEL NUMBER		PROJECTION	PART NO: C/D
APPROVALS	DATE	APP: APP			K240QVG-V1
CHK: CHK	DATE	APP DATA			
DWN: DWN	DATE	CHK DATA			
		DWN DATA			